


data sheet: K4100T

Kroepelin GmbH
Gartenstraße 50
D-36381 Schlüchtern

Tel.: 06661 86 0
Fax: 06661 86 39
Mail: sales@kroepelin.com
Web: www.kroepelin.com

Kroepelin
Längenmesstechnik

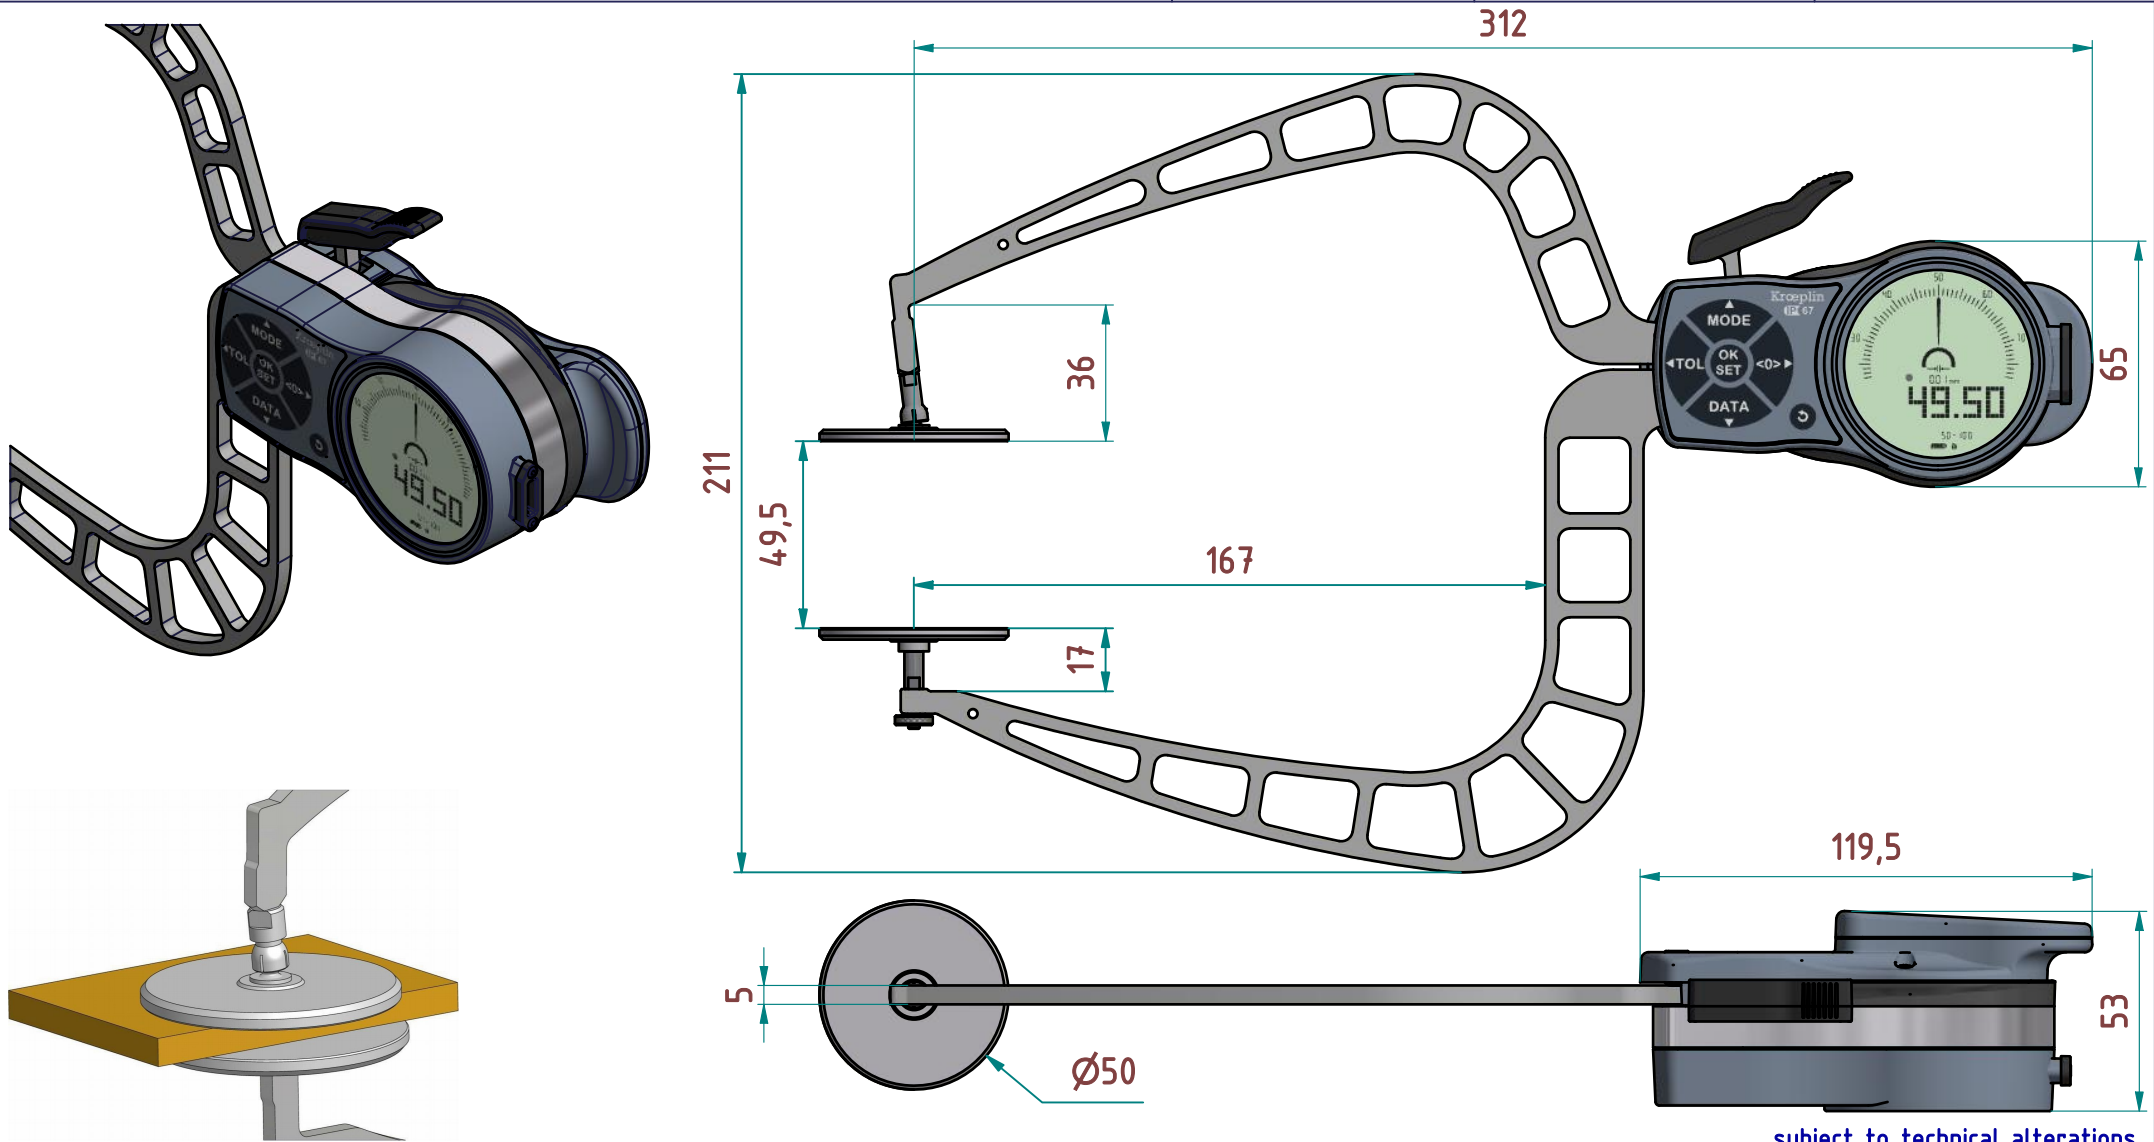


subject to technical alterations

type: K
range: 50 - 100 mm
range of indication: 49,5 - 100,5 mm
digital step: 0,01 mm
scale interval: -
measuring force: 0,8 - 1,7 N
weight: 520 g

acceptable deviations
 VDI/VDE/DGQ 2618 Bl. 12.1/13.1)
max. permissible errors "G": 0,06 mm
repeatability "r": 0,04 mm
reference temperature: 20° C
operation temperature: 10° C - 30° C
storage temperature: -10° C - 50° C

scale: 1:2
drawing-nr.: DAB-K4100T-K-e
date of issue: 18.03.2021
name: B. Schmidt
revision status:
revision date:

interface as accessories available:

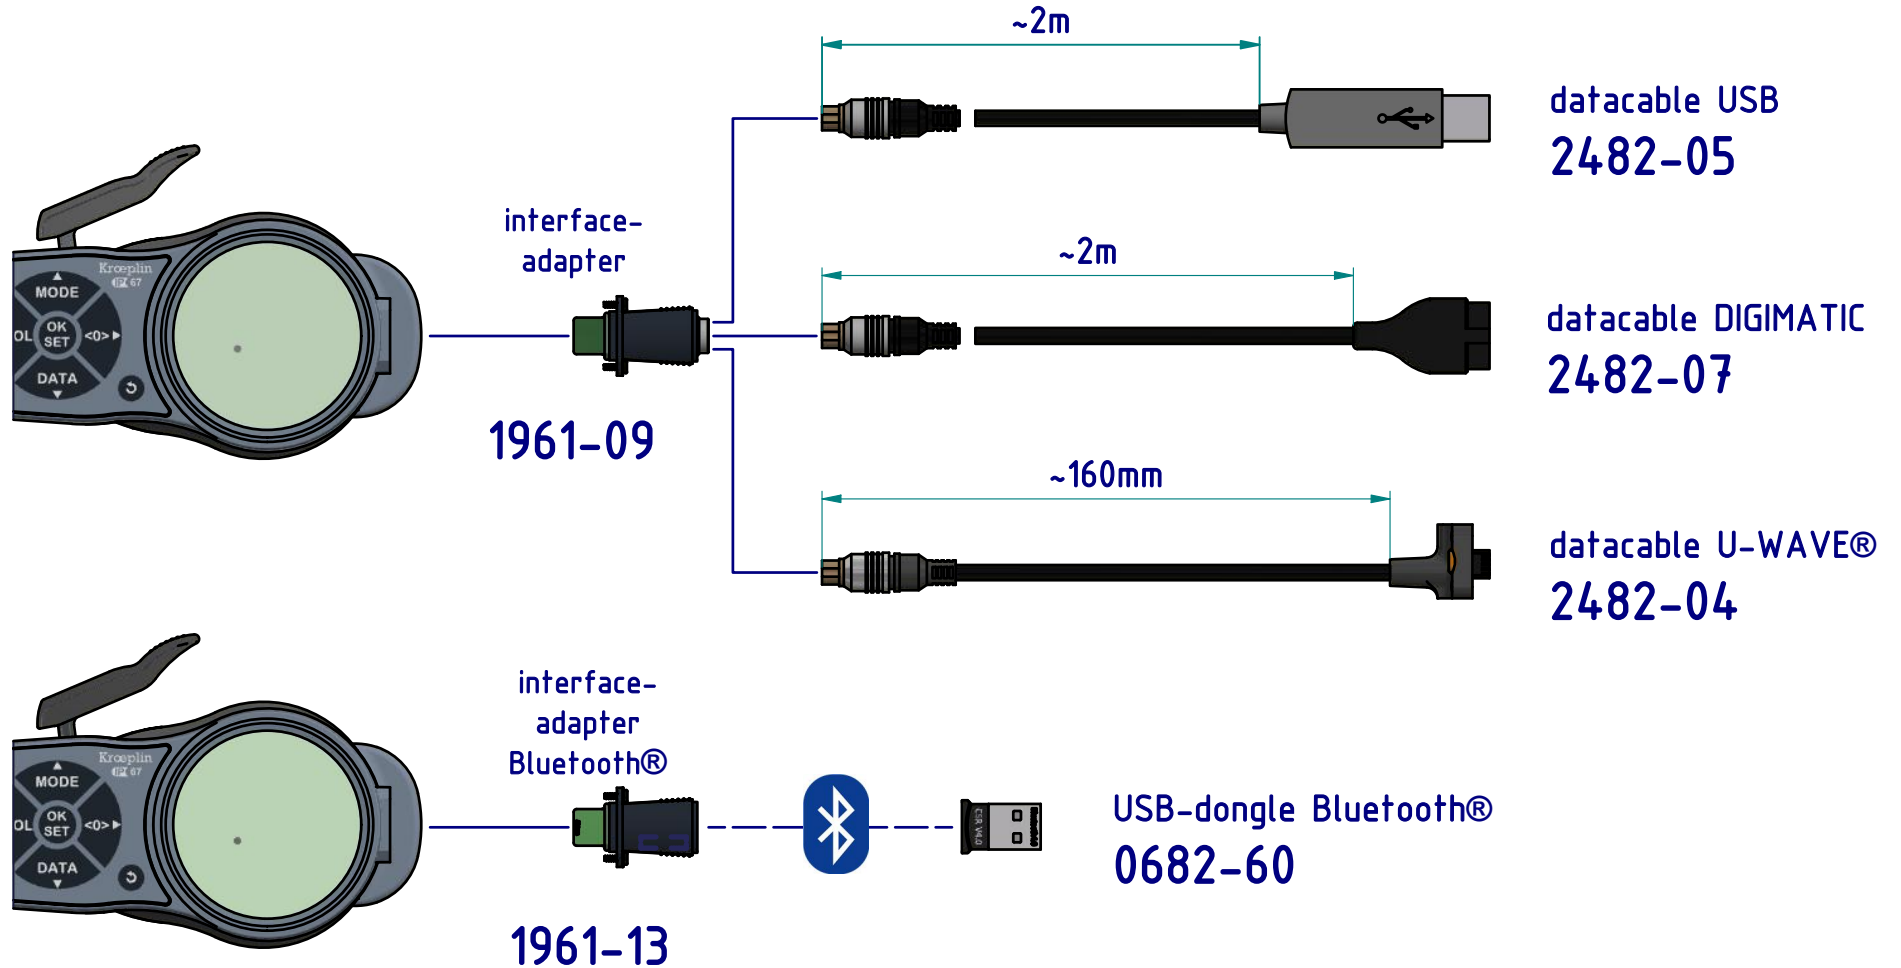

subject to technical alterations

drawing-nr.: DAB-K4100T-K-e
date of issue: 18.03.2021
name: B. Schmidt

revision status:
revision date: