

8

7

6

5

4



3

2


1

MATERIAL: 4140 STEEL HEAT TREAT TO 38-44 HRC
FINISH: BLACK OXIDE COATING
COMPATIBLE WITH ALL 5TH AXIS DOVETAIL CUTTER

DC1750-S

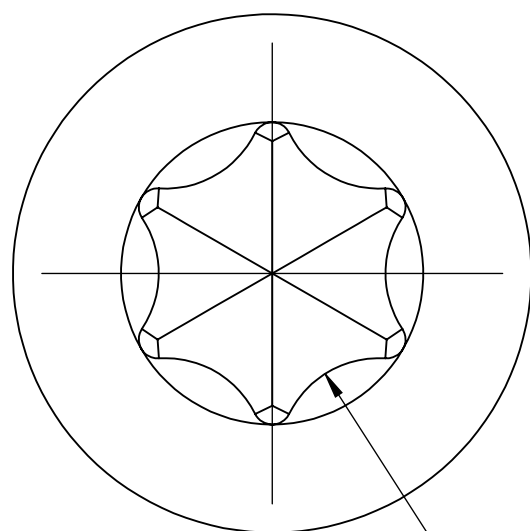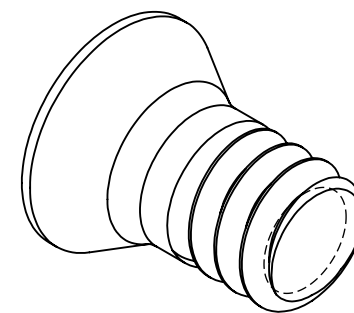

T15 TORX DRIVE

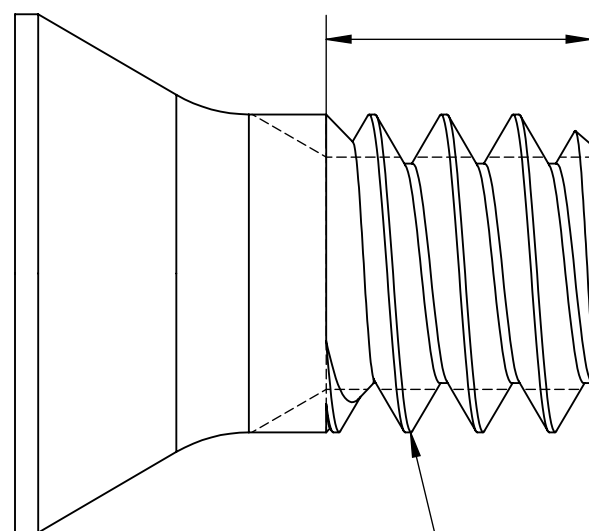

.115 MIN
THREAD LENGTH

#6-32 UNC-3A

INCH

DRAWN IN ACCORDANCE WITH
ASME Y14.5-2009

WWW.5THAXIS.COM

7140 ENGINEER ROAD
SAN DIEGO, CA 92111

P (858) 505-0432
F (858) 505-9344

TOLERANCES


UNLESS OTHERWISE SPECIFIED

x ± 0.1 .xx ± 0.01

.x ± 0.05 .xxx ± 0.005

ANGULAR ± 0.5°

THIRD ANGLE PROJECTION



DESCRIPTION

DOVETAIL CUTTER INSERT SET SCREW

SIZE
B

PART NO.

DC1750-S

REV
A

DO NOT SCALE DRAWING

SCALE 1:1

WEIGHT:

SHEET 1 OF 1

8

7

6

5

4

3

2

1

D

D

C

C

B

B

A

A